











MUD MATters

GROUND REINFORCEMENT WITHOUT SUBSTRUCTURE




SPECIFICATIONS

Length	19.69"
Width	19.69"
Height	2.12"
Weight/slab	14.77 lbs
Weight/m²	59.08 lbs
Coverage/slab	2.69/ft²
Coverage	4 units = 10.76 ft²
Items/pallet	164 units
Coverage/pallet	441 ft²
Material	100% recycled plastic
Connection	Overlapping tabs
Colour	Gray

KEY FACTS

- » Effective solution for mud in a wide range of vehicle access and construction site applications
- » Excellent water drainage through the surface
- » Durable, non-rotting and weather resistant
- » Frost and UV-resistant
- » Low maintenance and cost effective throughout the product life
- » Interlocking design enables easy and quick installation
- » Easy to extend or remove at any time

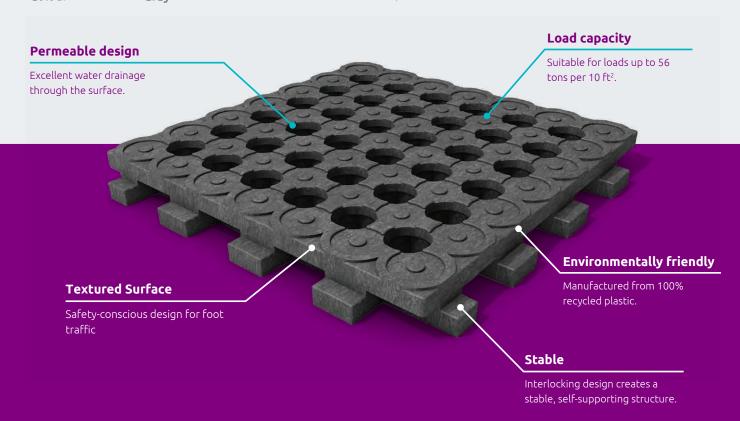



TECHNICAL SPECIFICATION MUD MATters

LAYING INSTRUCTIONS

Step 1

Level or fill any large bumps or holes in the ground. Lay down the first row of Mud Matters across the full length of the area to be covered

Important: Leave a small expansion gap of $\frac{1}{4}$ " in cooler weather. A small space should also be left between the grids and buildings or edging structures



Step 2

The second row of grids should be staggered against the first.

Inserting: The grids should fit loosely together to avoid high tensions during extreme hot or cold weather.

If you wish to cut: Mud Matters are easily cut with skill saws, bench saws, panel saws or jig saws.



Step 3

Lay down the second row of grids after the first row has been done. Mud Matters make it easy to cover large areas relatively quickly. Although the grids adapt well to uneven ground, level ground gets the best results.).













Archway Control, LP 301 Ave. H Ft. Madison, IA 52627

(319) 835-9090 (office) (309) 258-0410 (mobile) sales@archwaycontrol.com www.archwaycontrol.com

100% recycled 100% recyclable